
science for a changing world

Prepared in cooperation with the NATIONAL PARK SERVICE (NPS) AND THE NATIONAL AERONAUTICS AND SPACE ADMINISTRATION (NASA)



OPEN FILE REPORT 2008-1326 TILE 31 of 38 (BE)

Brock, J.C., Wright, C.W., Nayegandhi, A., Stevens, S., and Travers, L. J., 2008, USGS-NPS-NASA Bare Earth Topography-Colonial National Historical Site, U. S. Geological Survey Open File Report 2008-1326 (On DVD).

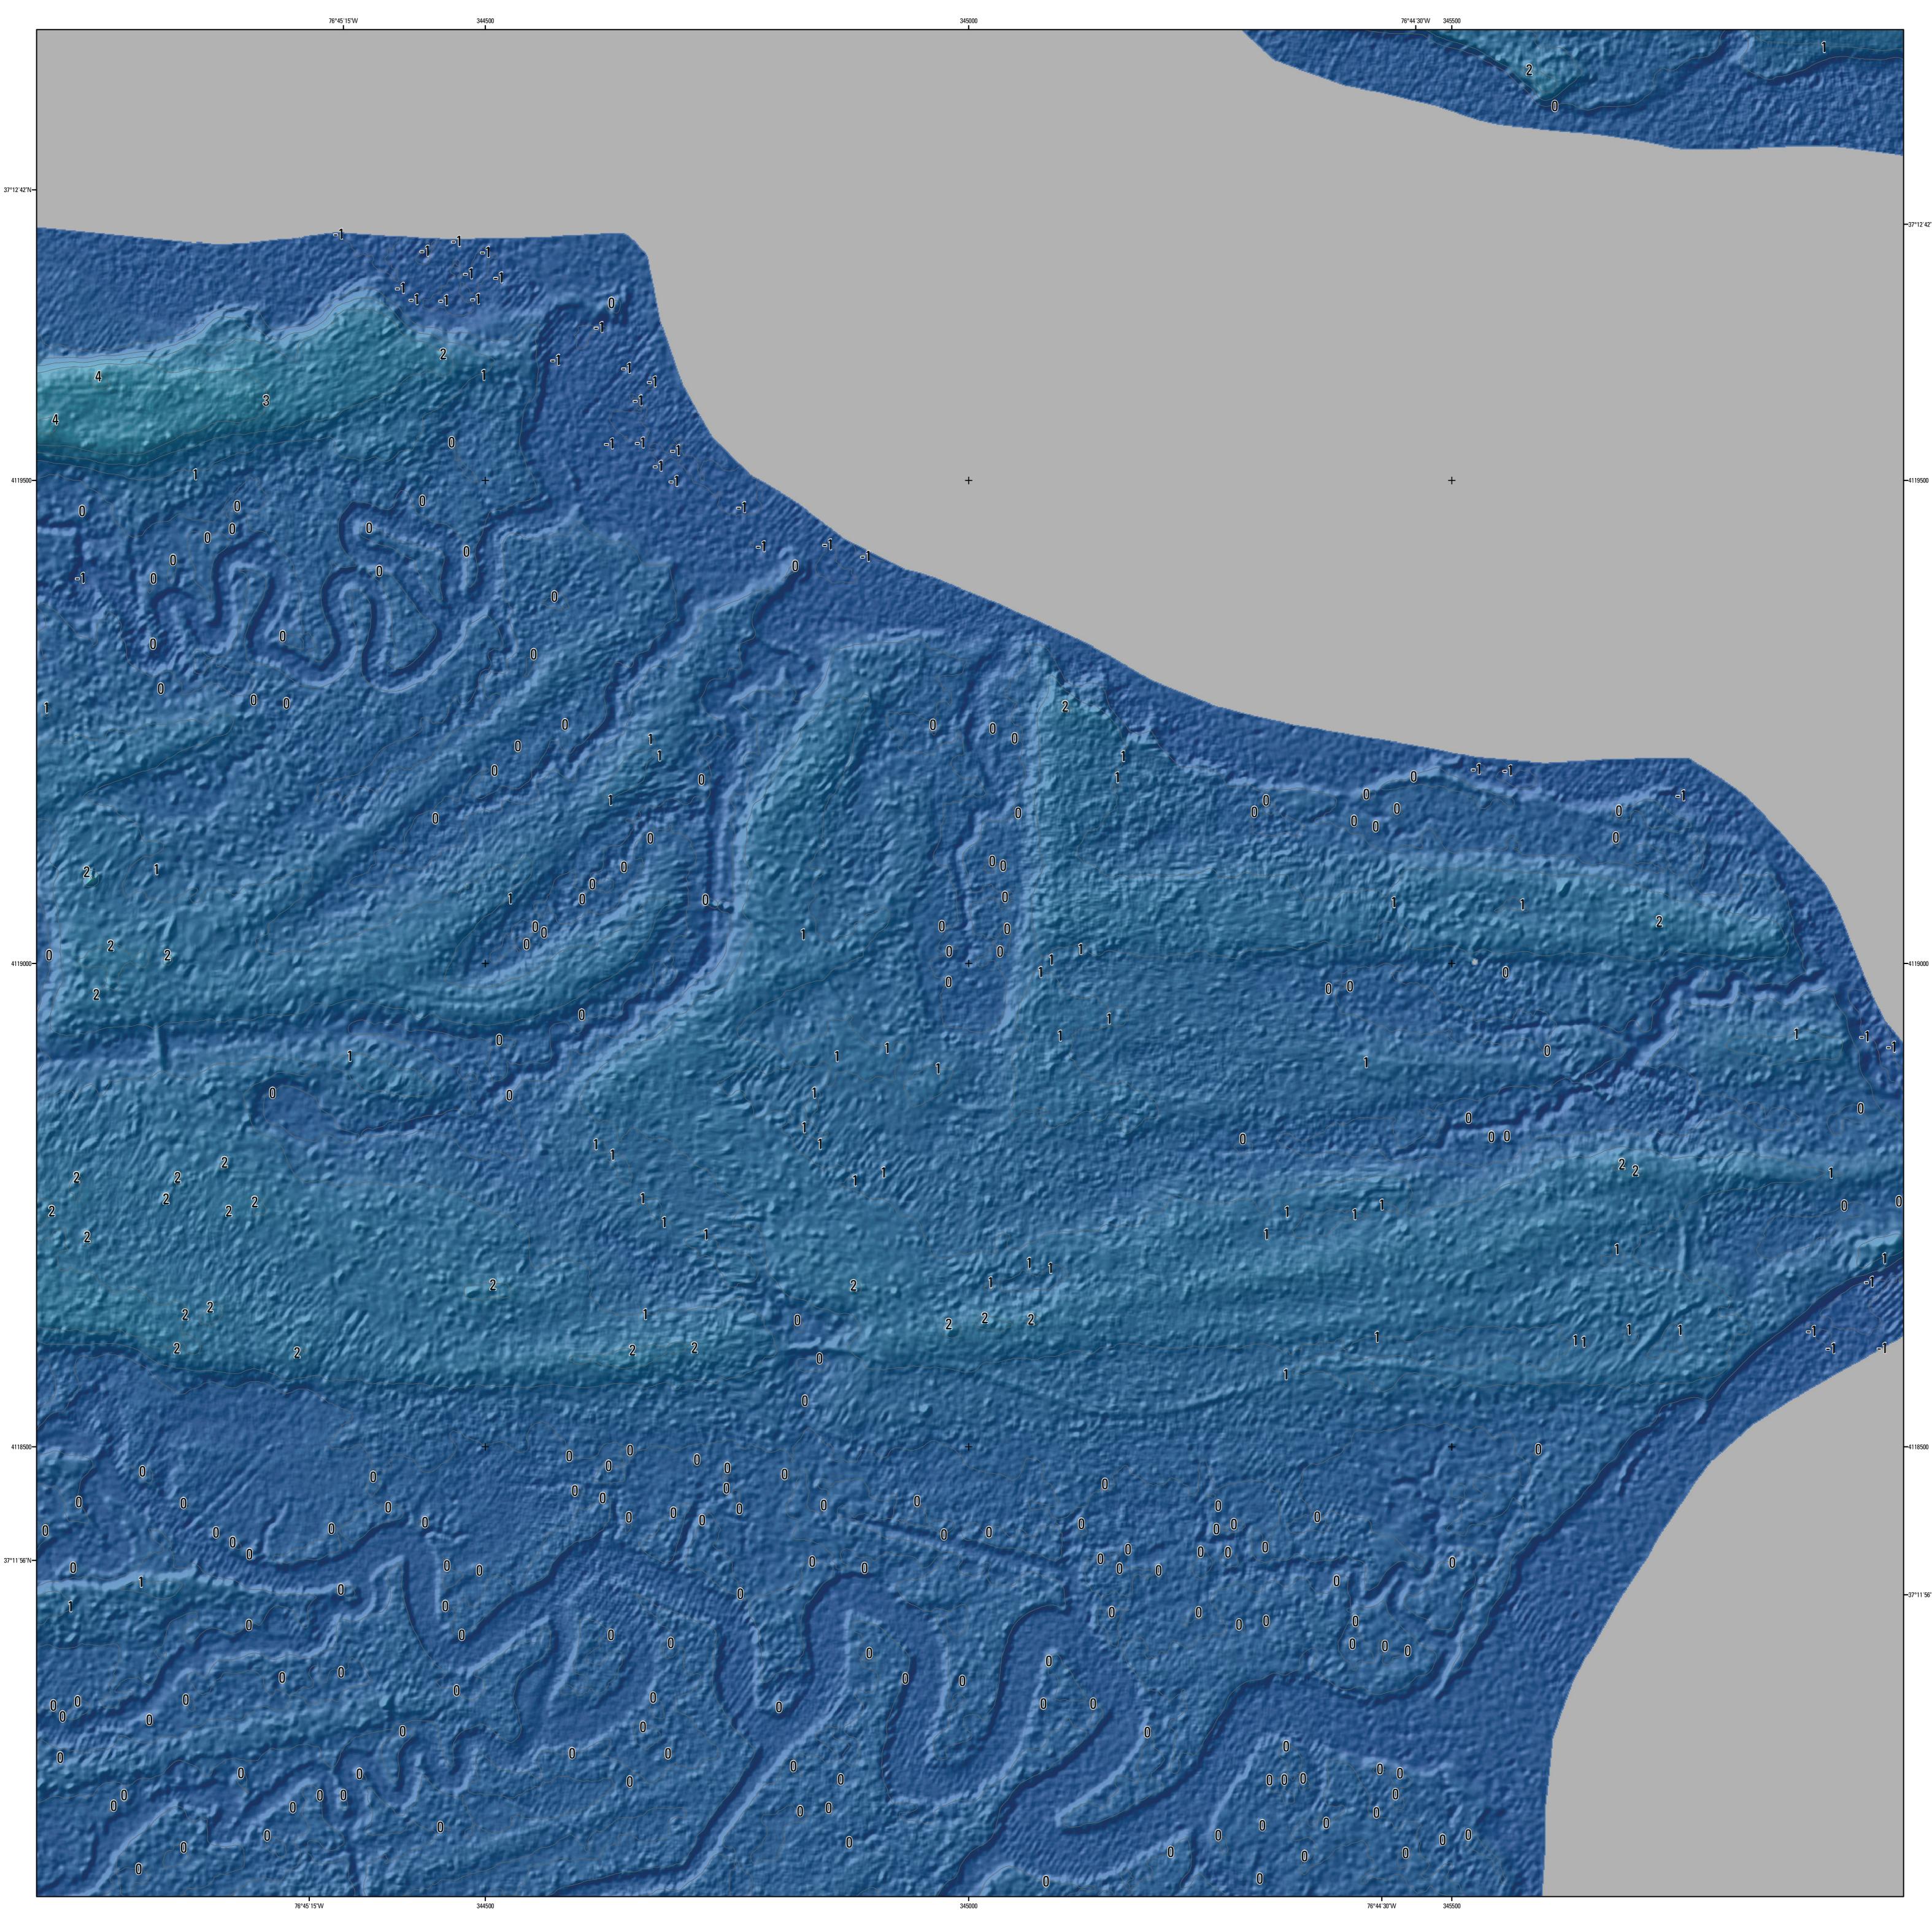

Universal Transverse Mercator. 1983 North American Datum-Zone 18 North Topography mapped using NASA Experimental Advanced Airborne Research Lidar (EAARL) April 2005. This map is not intended for use in navigation.

Project Description
This Lidar-derived topographic map was produced as a collaborative effort between the U.S. Geological Survey (USGS)
Coastal and Marine Geology Program, the Northeast Coastal and Barrier Network of the National Park Service (NPS)
Inventory and Monitoring Program, the South Florida/Caribbean Network of the NPS Inventory and Monitoring Program, and the National Aeronautics and Space Administration (NASA) Wallops Flight Facility. The aim of the partnership that created this product is to develop advanced survey techniques for mapping barrier island geomorphology and habitats, and to enable the monitoring of ecological and geological change within National Seashores. This product is based on data from an innovative airborne Light Detection and Ranging (LiDAR) instrument under development at the NASA Wallops Flight Facility, the NASA Experimental Advanced Airborne Research Lidar (EAARL).

Data DescriptionThe laser soundings

The laser soundings used to create this map were collected during April 2005 by the NASA EAARL system mounted on a Cessna 310 aircraft. The EAARL uses a "waveform-resolving" green laser capable of mapping submarine and subaerial (land) topography in a single overflight. The EAARL system is typically flown at 300 m altitude AGL, resulting in a 240 m swath for each flightline. Data collection occurred with approximately 50% overlap between flightlines, resulting in about one laser sounding per square meter. The data were processed by the USGS FISC (Florida Integrated Science Center) office, St. Petersburg, FL to produce 1-meter resolution raster images that can be easily ingested into a Geographic Information System (GIS). The data were organized as 2 km by 2 km data tiles in 32-bit floating-point integer GeoTiff format. Contour line and hillshade layers were generated from the Lidar data tile and incorporated into this map product.

Further Reading

Brock, J.C., and Sallenger, A., 2001, Airborne topographic Lidar mapping for coastal science and resource management: U.S. Geological Survey Open File Report 01-46, p. 4.

Brock, J.C., Wright, C.W., Nayegandhi, A., Clayton, T., Hansen, M., Longenecker, J., Gesch, D., and Crane, M., 2002, Initial results from a test of the NASA EAARL Lidar in the Tampa Bay Region: Transactions of the Gulf

Coast Association of Geological Societies, v. 52, p. 89-98.

Wright, C.W. and Brock, J.C., 2002, EAARL: A Lidar for mapping shallow coral reefs and other coastal environments, *in* the Proceedings of the Seventh International Conference on Remote Sensing for Marine and Coastal Environments, Miami, May 20-22, 2002: Ann Arbor, MI, Veridian International Conferences, 1 computer optical disc.

SCALE 1:2400 0.1 0.05 0 0.1 0.2 0.3 MILES 0.1 0.05 0 0.1 0.2 0.3 KILOMETERS NORTH AMERICAN VERTICAL DATUM OF 1988

Colonial National Historical Park USGS-NPS-NASA EAARL Bare Earth (BE) Lidar Topography Map Tile 344000e_4120000n

CONTOUR INTERVAL IS 1 METER

By John C. Brock¹, C. Wayne Wright², Amar Nayegandhi³, Sara Stevens⁴, and Laurinda J. Travers⁵

¹ U. S. Geological Survey, FISC, St. Petersburg, FL

² NASA Wallops Flight Facility, Wallops Island, VA

ETI Professionals, Contracted to USGS, St. Petersburg, FL
 NPS Northeast Coastal and Barrier Network Inventory and Monitoring Program, Miami, FL
 Eckerd College, Contracted to USGS, St. Petersburg, FL

2008

